



# P-500 ALPS PROXIMITY READER




DOORS



PARKING



TURNSTILES

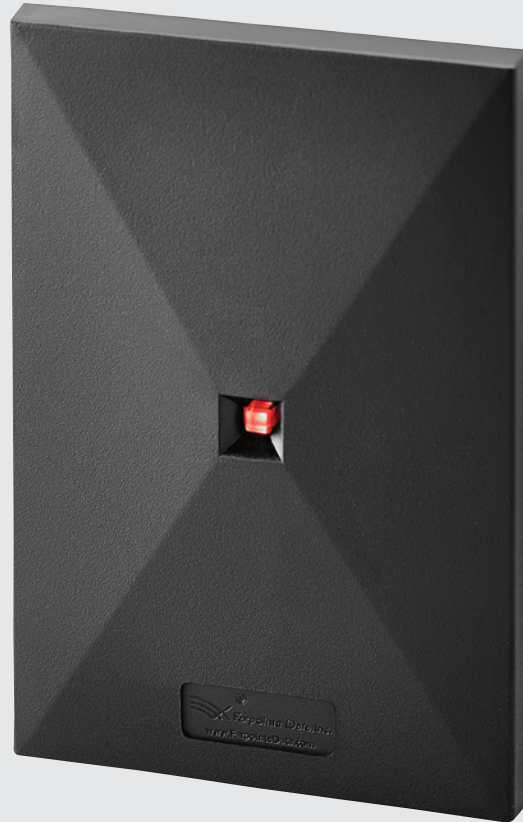

## *Pyramid Series Proximity*<sup>®</sup>



**Frequency:** 125 kHz

**Read Range:** Up to 8 inches (202 mm)



### **MAXSecure™**

Unique Security Feature



### **fleaPower™**

Energy-Conservation Technology



### **Pro-X™**

Read-Range Boosting Technology



### **ETL Listed**

Independently Tested and Certified to Conform to UL Standard 294



### **Warranty**

Lifetime Warranty



### **Wiegand**

Output Interface



### **U.S. Single-Gang Wall-Box Mount**

Metal or Plastic Box & Flat Surfaces

## P-500 ALPS PROXIMITY READER

*Pyramid Series Proximity®* from Farpointe Data sets the electronic security benchmark for 125-kHz proximity readers, cards, and tags. Based upon proven contactless digital radio frequency identification (RFID) technology, Pyramid readers interface with a wide range of electronic access control systems by complying with the Wiegand communication protocol. They offer value-add features such as MAXSecure™ and fleaPower™, and can be ordered to support several proximity card and tag technologies. Additionally, Pyramid cards and tags are passive devices, eliminate maintenance by requiring no battery, and can be ordered to support several proximity reader technologies.

Specifications	P-500
Technology	Proximity
Frequency	125 kHz
Mounting	Metal or plastic US single-gang wall box, as well as flat surfaces
Dimensions	3" W × 4.6" H × 0.4" D (76 mm × 117 mm × 10 mm)
OEM Label Area Dimensions	0.9" W × 0.35" H (22.86 mm × 8.89 mm), with corner radius of 0.06" (1.5 mm)
Weight	4 oz (113 g)
Certifications	FCC, ICC, CE, C-Tick, UL Standard 294 <sup>1</sup>
IP Code <sup>2</sup>	IP67
Voltage <sup>3</sup>	+5 – 16 VDC
Current Draw	35 mA typical, 75 mA peak @ 12 VDC
Read Range <sup>4</sup>	Up to 8 inches (202 mm)
Cabling <sup>5</sup>	24 AWG minimum, multiconductor stranded with an overall foil shield
Interface	Wiegand ABA Track II
Operating Temperature	–40° F to 149° F (–40° C to +65° C)
Color Options	Black and a white snap-on cover included standard
Audio Tone	Beeper included standard
Indoor & Outdoor Installation	Electronics sealed in weather- and tamper-resistant epoxy potting
Warranty	Limited lifetime warranty
LED	Four-state standard (red, green, amber, and off)
Technologies Supported	P-500: <i>Pyramid Series Proximity®</i> Cards and Tags <sup>6</sup> P-500-H: Pyramid + certain HID® 125-kHz Proximity protocols <sup>7</sup> P-500-A: Pyramid + certain AWID® 125-kHz Proximity protocols <sup>8</sup> P-500-H-A: Pyramid + certain HID® 125-kHz Proximity protocols + certain AWID® 125-kHz Proximity protocols

### NOTES:

- 1 Carrying the ETL Label and tested by Intertek, conforms to UL Standard 294.
- 2 Self evaluated.
- 3 Linear power supplies are recommended for best operation.
- 4 Using PSC-1 Standard Light Proximity Card with 12 VDC at the reader.
- 5 For example, Belden 9535 or similar, supporting the five conductors comprising the physical layer of the Wiegand interface (power, ground, data 0, data 1, and/or beeper and LED). Alternatively, Belden 9539 or similar, for all reader functions. Contact your access control system manufacturer for their specific requirements.
- 6 Examples may include, and may not be limited to, PSC-1, PSI-4, PSM-2, PSK-3, and PDT-1.
- 7 Examples may include, and may not be limited to, ProxCard II®, ISOProx® II, and ProxKey® II.
- 8 Examples may include, and may not be limited to, CS Prox Card, GR (ISO) Graphics Quality Prox Card, and KT Key Tag.



Farpointe Data reserves the right to change specifications without notice.

© 2012-2019 Farpointe Data, Inc. All rights reserved. Farpointe Data®, *Pyramid Series Proximity®*, Delta®, Ranger®, and CONEKT® are the registered U.S. trademarks of Farpointe Data, Inc. AWID is a registered trademark of Applied Wireless Identifications Group. HID, the HID logo, ProxCard II, ISOProx, and ProxKey are registered trademarks of HID Global Corporation, an ASSA ABLOY company. All other trademarks are the property of their respective owners.

[www.farpointedata.com](http://www.farpointedata.com)

**Farpointe Data, Inc.**  
 2195 Zanker Road  
 San Jose, CA 95131 USA  
 Office: +1-408-731-8700  
 Fax: +1-408-731-8705  
[support@farpointedata.com](mailto:support@farpointedata.com)

