
Standard Features for Telephone Entry

- Stand alone functionality or seamless integration with Keri's access control system and Doors.Net software for real access control and telephone entry integration
- Four line, large font, soft white supertwist LCD display, Lexan[™] cover
- Three 80 character, programmable, scrolling pages for instructions and messages with automatic timed rotation
- 750 tenant capacity, customer does not pay for extra capacity
- Up to 6-digit directory code, up to 5-digit Entraguard ID codes (PINs), up to 15-digit telephone numbers
- Networkable to manage multiple doors via RS-485
- Time Zone restrictions for calling tenants and for PINs
- Links a visitor to the resident who allowed entry
- Telephone entry units and access control units can be combined on a single network for a total of 128 controller units
- Flexible connectivity: RS-232, Modem, TCP/IP
- Stores up to 3,640 events, manages up to 255 individual sites
- Weather and vandal resistant housing
- Programmable talk time, tone dialing, adjustable volume
- · Quick disconnect terminals
- Two Mylar[™] speakers with superior sound
- Heavy duty door and alarm relays, door forced open and door held open alarms
- Built-in surge protection, non volatile memory
- Powerful Doors.Net Access Control Software with full access control features: time zones, temporary users, online programming, operator security levels, multiple site management, and automatic configuration



Like its sister products, the Entraguard Platinum and Titanium, the Silver provides the best telephone entry/access control marriage by letting the unit function as a node on a PXL controller network, putting both applications under the acclaimed Doors.Net software umbrella for a seamless integration of the two. Additionally, the Silver, like the Platinum, can contain a PXL-500 Tiger Controller and an SB-593 Satellite Expansion Board for up to two doors of built-in card access in the same housing. A walk-up package addresses the basic visitor and resident control for the main entrance to a building.

Each Entraguard Silver also has two extra relay outputs that can be used in a variety of ways including turning on a lobby light, unlocking an interior door, or providing access to two separate entrances by using tone commands from the tenant's location or based on an access granted decision. An on-board modem is also included for remote programming.





www.kerisys.com

302 Enzo Drive • San Jose, California 95138 • email: sales@kerisys.com Phone: 408-435-8400 • Toll Free: 800-260-5265 • Fax: 408-577-1792

EGS-750 Entraguard Silver TM

DATA SHEET - Page 2 of 2

Access Control Features

- True, integrated access control with PXL-500 or NXT controllers
 the Silver becomes part of a Keri access control network
- Simple, one button auto-configuration
- 32 time zones, 3 holiday schedules
- Unlimited access control groups
- Automatically expiring Entraguard IDs (PINs) and cards
- Time Zones on Entraguard IDs (PINs) and cards, as well as doors and gates
- Full reporting of events
- Direct door operation from PC
- · Automatic lock and unlock of doors and gates
- Assignable inputs and outputs (when using an optional SB-593 on a PXL-500)
- · Rollcall/track, muster
- Image capture and optional badge printing
- Remote online management of multiple sites
- System operator security levels with configurable privileges

Special Telephone Entry Features

- Do not Disturb Call Feature programmable for individual tenants
- Do not Display Name Feature programmable on a per tenant basis
- Remote online management of multiple sites
- Ability to link visitors to the residents who allowed them entry
- Ability to update several units in one pass
- Pre-wired walk-up package

General Features:

- Surface or recess mount
- Weather and vandal resistant housing
- Postal lock provision
- Non-volatile memory
- Built-in surge protection plus surge protection kit
- Programmable talk time
- Door forced open and door held open alarms
- · Tone dialing
- · Alarm output relay
- · Adjustable volume control
- Maintenance free LED lighting
- Two Mylar[™] speakers with superior sound
- · Quick disconnect terminals

Specifications:


- Capacity: Up to 750 Tenants
- Outputs: Door Relay, Alarm Relay, 2 additional programmable relays

(continued next column)

- Operating Temperature: +5° to 140° F (-15° to 60° C) with heater: -20° to 140° F (-29° to 60° C)
- Input Power: 12 VDC @ 1 A
- Current Draw: 750 mA
- Relay Contact Rating: 1 A @ 24 VDC
- Size: 13.88" H x 10.34" W x 3.5" D (35.3 cm x 26.3 cm x 8.9 cm)
- Weight: 12.30 lbs (6.09 kg)
- · Material: 14 gauge stainless steel
- · Warranty: 2 years
- · Finish: Brushed Stainless Steel

Options / Accessories:

- Camera
- Postal Lock
- Hooded Enclosure / Pedestal Mount
- Recessed Wall Mount Kit
- Heater
- (for operation below 5° F/-15° C)
- No Phone Line System

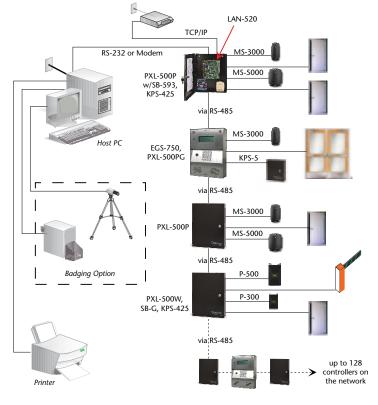

ORDERING INFORMATION:

<u>Model #</u>	<u>Description</u>
EGS-750HF	Entraguard Silver Telephone Entry Sy

For pre-installed color camera, add "-CO" to the above model number

RELATED PRODUCTS:

CU-EGT-/50	Firmware upgrade for litanium/Silver Entraguard units
EGS-WUPW	Entraguard Walk-Up Package (includes EGS-750, PXL-
	500GW, P-300, KDP-552, boxed and prewired)
EGS-WUPP	Entraguard Walk-Up Package (includes EGS-750, PXL-
	500GP, MS-3000, KDP-552, boxed and prewired)
EGH-12	Heater Kit for Entraguard Units
EGP-PL	Platinum/Silver Postal Lock Kit - Field Installation
EPS-58	Power Supply Kit for Entraguard Units
FMK-95	Recess Mount Kit for Platinum/Silver
HSE-95	Hood/Pedestal Mount Adapter for Platinum/Silver

Specifications subject to change without notice.

All trademarks are the property of their respective owners.

When using Entraguard products in a dial-up application, Keri requires the use of an approved modem. Please refer to the Recommended Peripherals list on the web site or contact Keri customer service.



Presented By: